

Delivering up to 522 lumens per foot, W5 Wall Wash LED Tape is a powerful, flexible and compact linear LED lighting solution. Deliver efficiency up to 87lm/w and target smooth wall wash, beam and graze effects. Custom tailored continuous run lengths up to 14.5ft make the W5 a perfect choice for landscape, signage and architectural highlighting. Safe 24VDC operation, dimmable, and IP65 rated for indoor or outdoor use. Available in 2700K, 3000K or 4000K.

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Up to 522 lm/ft **6W/FT** **90+ CRI**

Product Detail



Lighting	Number of LED's	14 Diodes/FT (46/m)
	Lamp	SMD 5060
	Beam Angle	White: 10°, 30°, 45° (Asymmetric), RGBW: 45°
	Average Life	50,000 Hours
Electrical	CCT Binning	SDCM <3 LED's
	Controls	0-10V, MLV, ELV, Phase-Cut, Triac, DMX, Bluetooth
	Input Voltage	24VDC
	Max Input Current	5A
Mechanical	Connections	20AWG, Copper Conductors
	Circuit	Class 2
	Housing Construction	Flexible PCB Board, Silicone Jacket
Environmental	Mounting Options	Channel, Clip
	Ingress Protection	IP65
	Certifications	cULus
	Operating Temperature	-4°F to 104°F (-20°C to 40°C)

Performance


CCT/Color		2700K	3000K	4000K	RGBW(3000K)
Power	W/FT (W/m)	6 (19.6)			
Lumens	lm/FT (lm/m)	480 (1,575)	510 (1,673)	522 (1,712)	320(1,050)
Efficacy	lm/W	80	85	87	53
CRI	CRI	90+			-
Increment	inch (mm)	6 (152)			
Max. Length	ft (m)	14ft 6in (4.4m)			


Ordering

Product Code	Series	CCT/Color	Beam Angle	Input Voltage	IP Rating
W5	F			24	IP65
		2700K	10°		
		3000K	30°		
		4000K	45° (Asymmetric)		
		RGBW(3000K)	45° (RGBW only)		




Dimensions

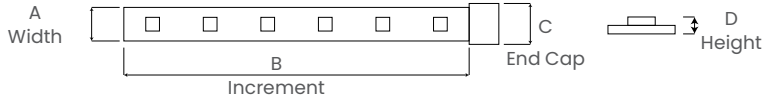


Section	A	B	C	D
	inch (mm)			
 DMP(IP65)	0.78 (19.8)	6 (152.4)	0.94 (24)	0.39 (10)

Mounting Channel

Surface Mount Profile with Flat, Opaque Lens Optic. Unit Includes Base Track, Lens Optic, Plastic End Caps with Screws & Surface Mounting Clips, IP20, MAX. 4FT LENGTH

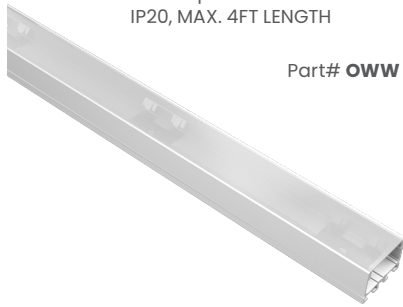

Part# **OWW SF 3021 FR IP20**

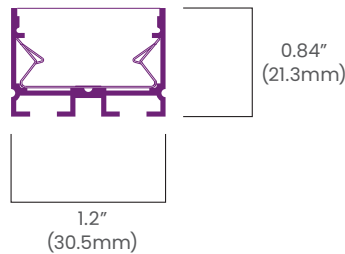

Surface Mount clip



Part# **OWW SFCP**

