

## BL inGROUND DISK 173 Printed Circular, Outdoor Recessed Luminaire 3W, 24VDC Constant Voltage Image: Constant Voltage

## Power Supply/Driver Requirements


BL inGROUND DISK 173 operates on 24VDC; please check the voltage rating before starting. It is imperative that a regulated DC power supply is used and Class 2 is highly recommended. Refer to tables in the technical data pages for the power draw requirements. Surge protection is recommended for all applications in order to protect against premature failure. Consult the electrical code for details on mounting and installing power supplies/drivers. Please remember that 24V LED In-Ground light is a low voltage product and consult the appropriate section of the electrical code when selecting wire.

## **Connection Diagrams**

Note:

•Wiring colours may vary with each product. Follow label instructions on the LED drivers

•Higher wattage LED drivers may have a third ground wire

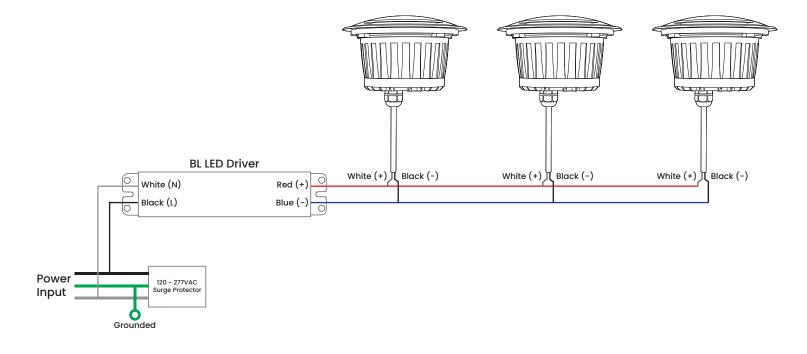

111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8
 P: 1-604-874-4405 E: info@bllighting.com
 Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure Lack of surge protection may void your warranty

For more information, please downlad the **BL LIGHTING** catalog



Specifications subject to change without notice. Please refer to our website at blighting.com for current technical data.

bllighting.com