


# Side Select V Pixel ID

BL Neonview

Diffused, Flexible, Linear LED Lighting,  
24VDC, Constant Voltage, Vertical Bend  
Side Profile, Silicone, Color Chasing



## Back Lead

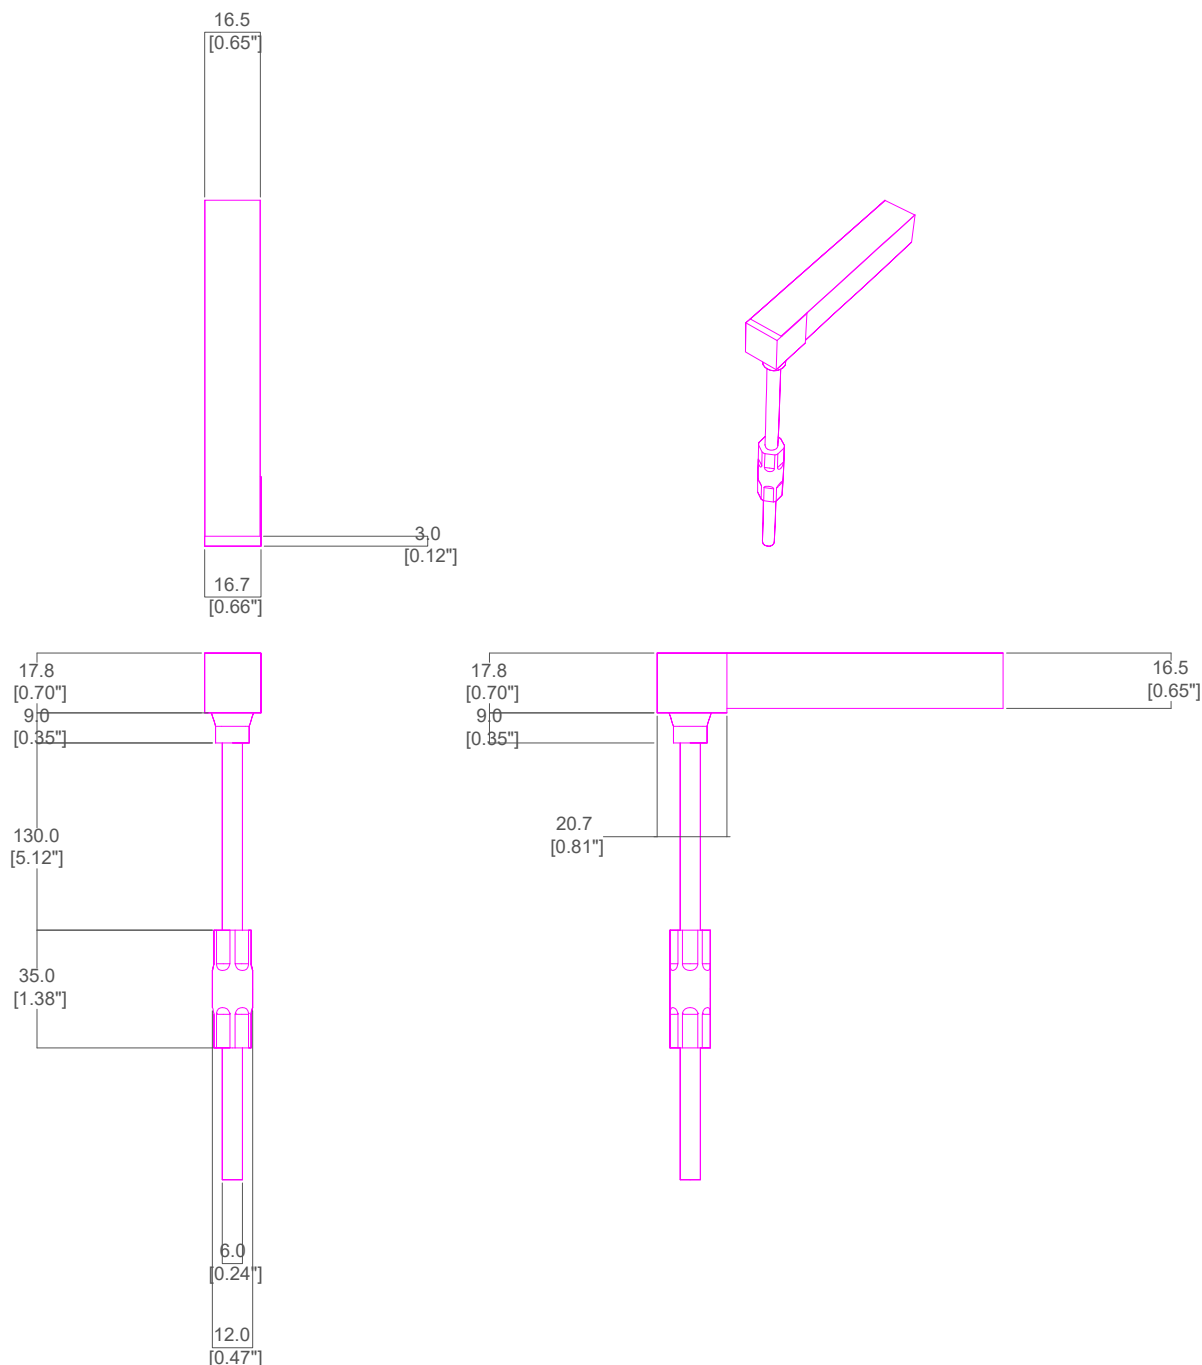

0 80mm

CAD Drawing subject to change without notice.

**BL LIGHTING**  
ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@bllighting.com

Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

For more information,  
please download the  
BL LIGHTING catalog

[bllighting.com](http://bllighting.com)



## BL Neonview



Technical drawing of a mechanical assembly, showing three views: front, side, and top. The drawing includes dimensions in millimeters (mm) and inches (in).

**Front View (Top Left):**

- Overall height: 16.3 mm [0.64 in]
- Overall width: 9.0 mm [0.35 in]
- Distance from top to center of hole: 130.0 mm [5.12 in]
- Distance from center of hole to bottom: 35.0 mm [1.38 in]
- Distance from center of hole to right edge: 3.0 mm [0.12 in]

**Side View (Top Right):**

- Overall length: 16.5 mm [0.65 in]
- Overall width: 9.0 mm [0.35 in]
- Distance from left edge to center of hole: 130.0 mm [5.12 in]
- Distance from center of hole to right edge: 3.0 mm [0.12 in]
- Distance from center of hole to bottom: 35.0 mm [1.38 in]

**Top View (Bottom):**

- Overall width: 16.7 mm [0.66 in]
- Overall length: 17.2 mm [0.68 in]
- Distance from left edge to center of hole: 130.0 mm [5.12 in]
- Distance from center of hole to right edge: 3.0 mm [0.12 in]
- Distance from center of hole to bottom: 35.0 mm [1.38 in]
- Distance from center of hole to right edge: 0.7 mm [0.03 in]
- Distance from center of hole to bottom: 17.0 mm [0.67 in]



**Dimensions and Tolerances:**

- Ø6.0 [Ø0.24 in]
- Ø12.0 [Ø0.47 in]

CAD Drawing subject to change without notice.



## Right Side Lead

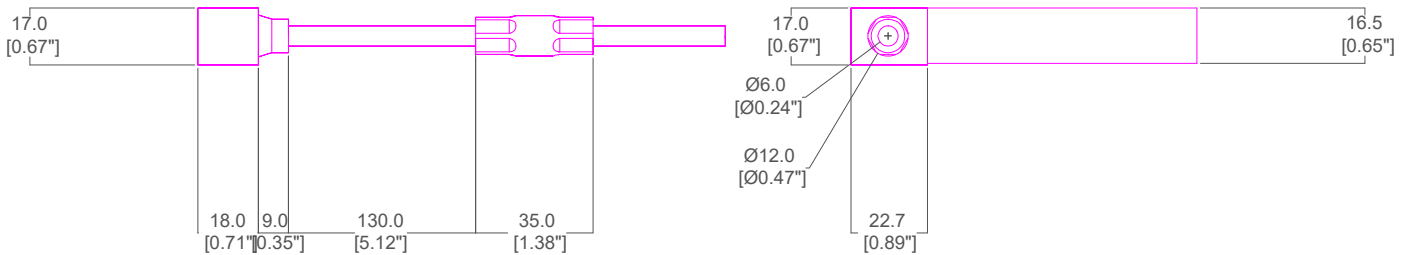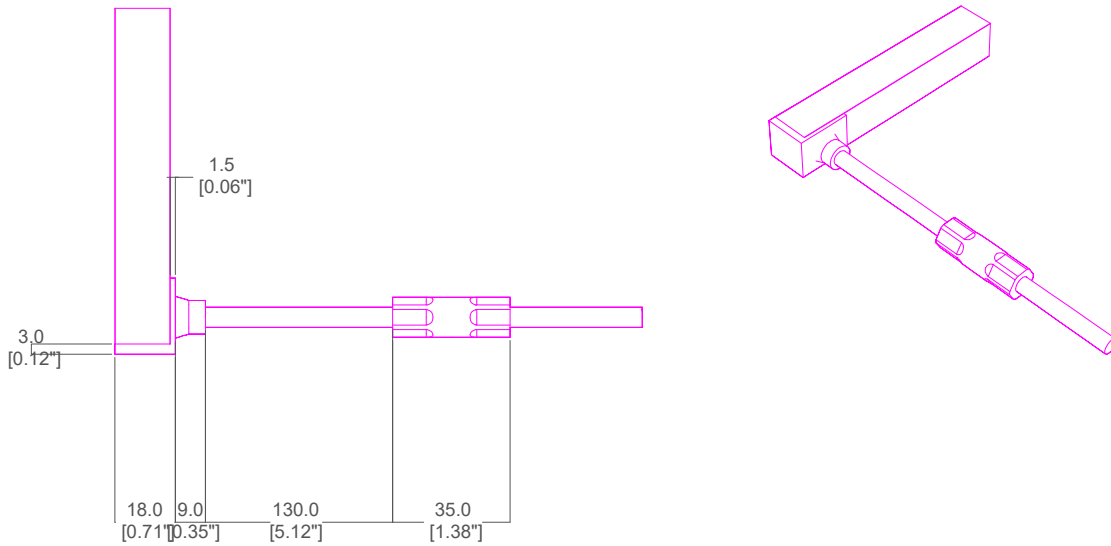

0 80mm

CAD Drawing subject to change without notice.




# Side Select V Pixel ID

BL Neonview

Diffused, Flexible, Linear LED Lighting,  
24VDC, Constant Voltage, Vertical Bend  
Side Profile, Silicone, Color Chasing



## End Cap

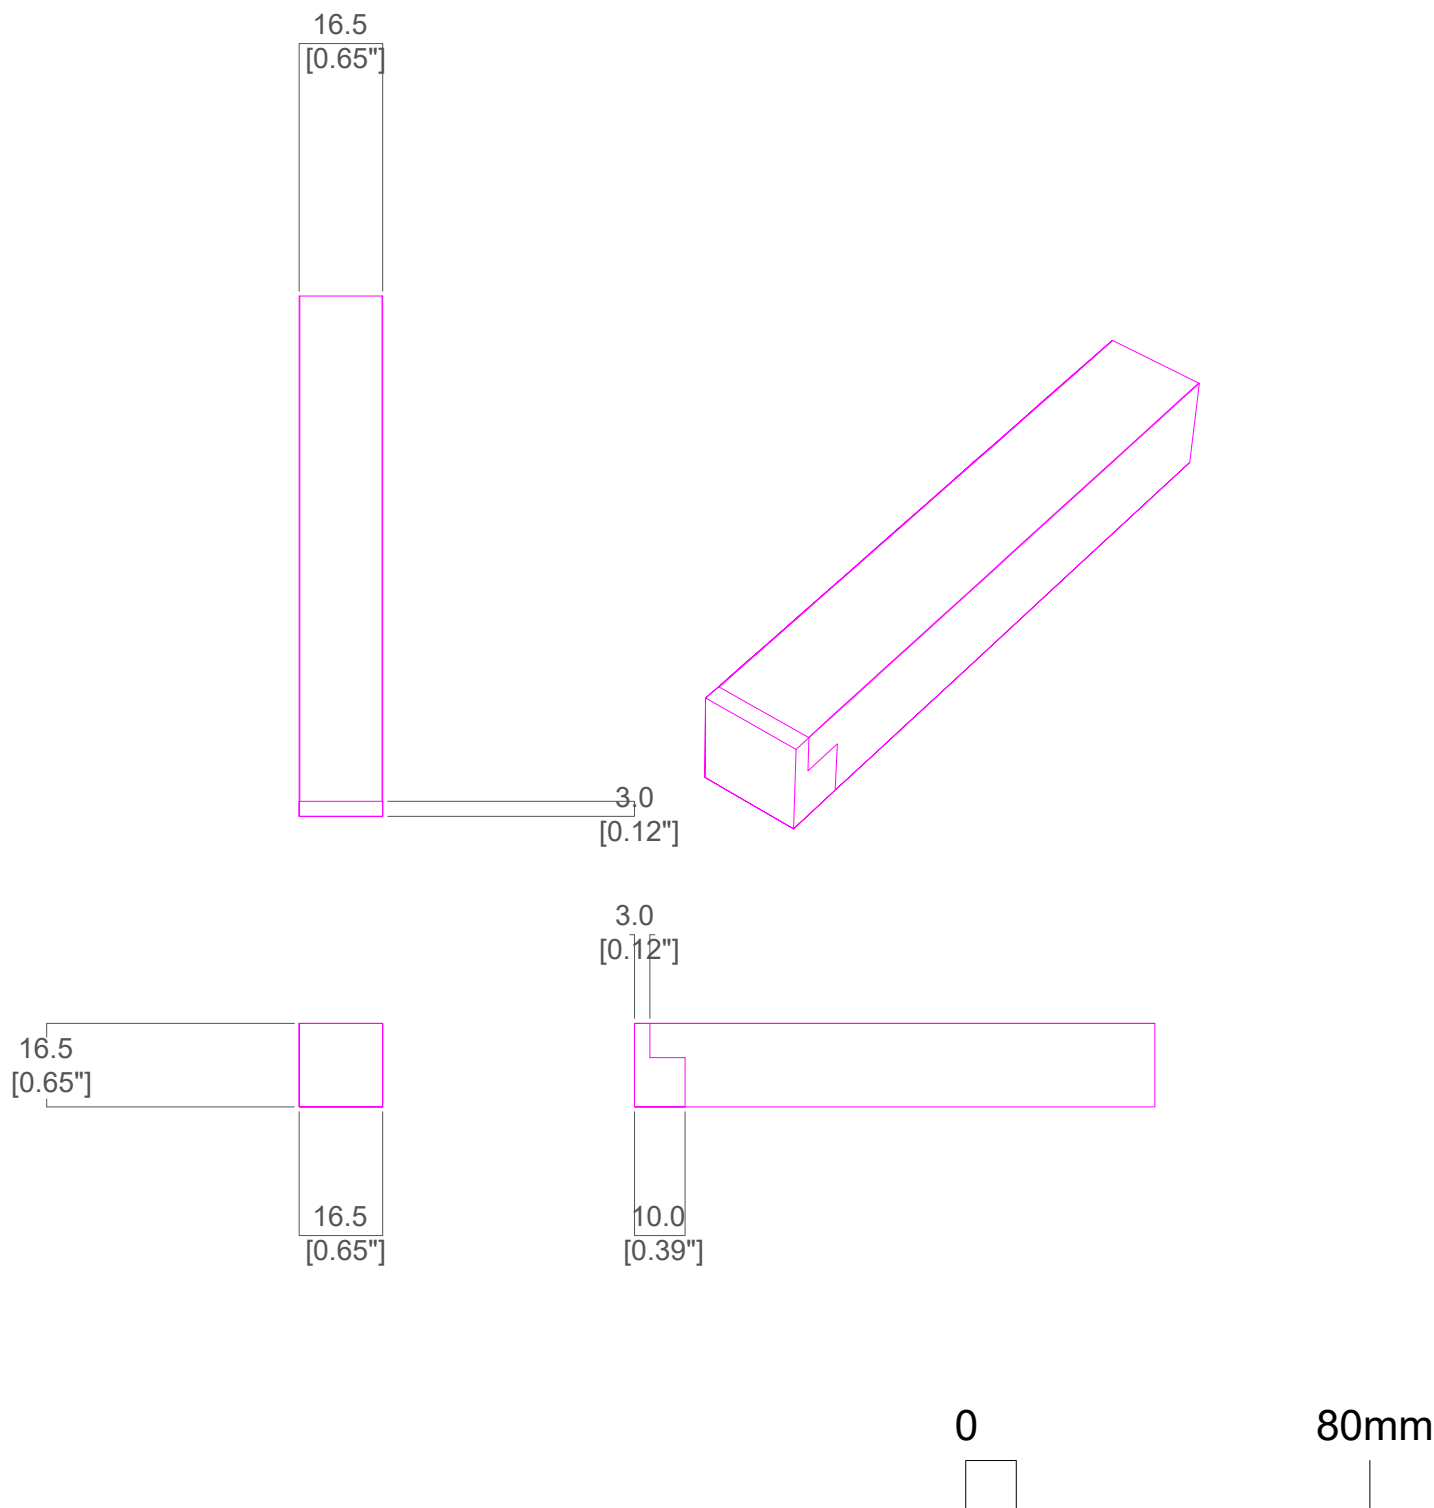

CAD Drawing subject to change without notice.

### BL LIGHTING

ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8

P: 1-604-874-4405 E: info@bllighting.com

Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

For more information,  
please download the  
BL LIGHTING catalog

[bllighting.com](http://bllighting.com)

