


BL areaGRAZE NSN2



3000K

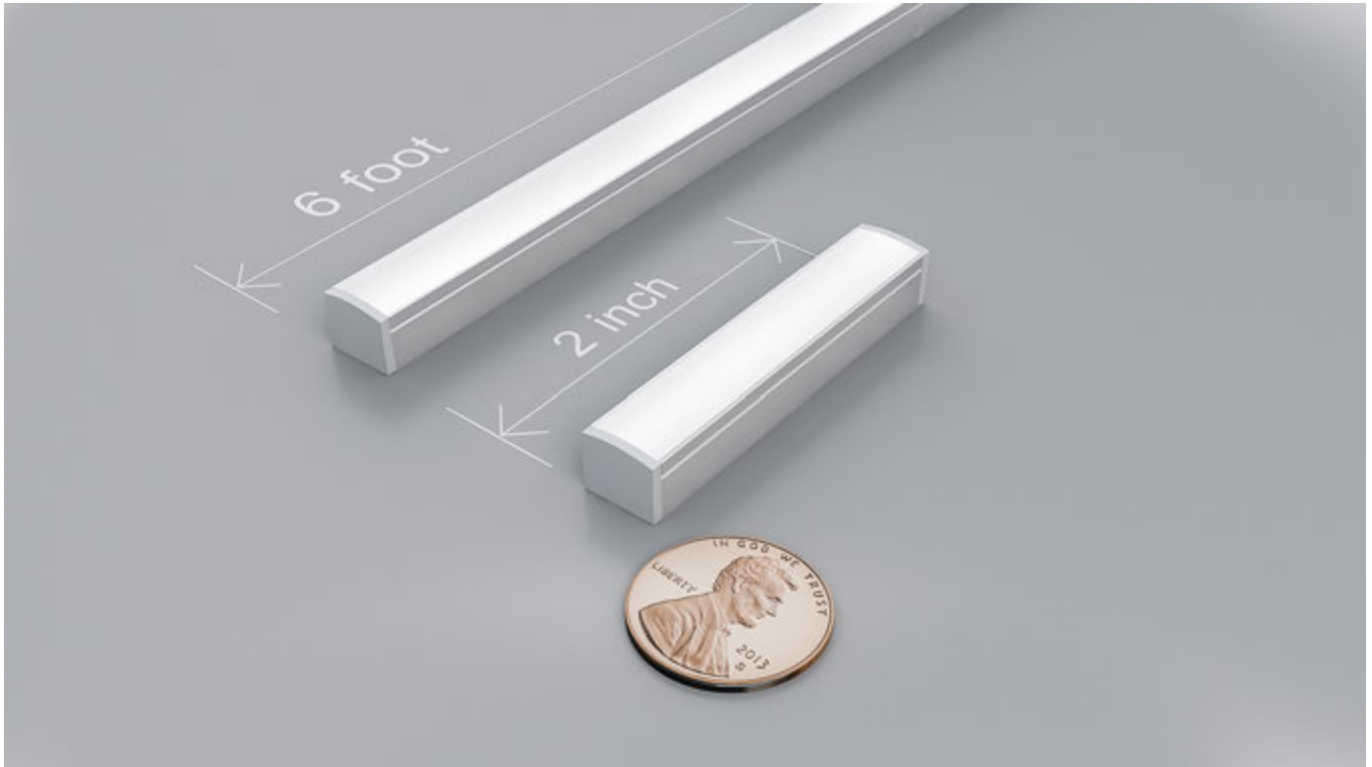

4000K

94

CRI



0-10V




MLV



2" to 6'

LENGTH



BL areaGRAZE NSN2 gives you the opportunity to illuminate everything with one of the world's thinnest and most powerful LED solutions. The super slim elegant design allows for seamless connections hidden within the structure.

This thin and light profile is a perfect choice for narrow surface applications where homogeneous lighting is required. Available in a range of color temperatures of 3000K or 4000K with a high 94 CRI. Can be easily dimmed 0-10 V or MLV with Dimming controls. Lengths available from 2 inch to 6 foot, 21/64 inch in width & 26/64 inch in height.




BL areaGRAZE

Surface Mount Luminaire

NSN2

Printed

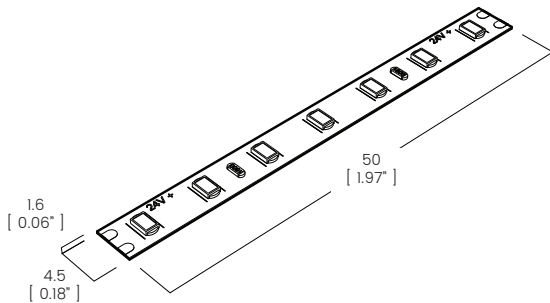

Features



Lighting



Lamp	LED, SMD 3528, 18 Diodes/FT
CRI	94
Power	1.85W/FT
Beam Angle	120°
Average Life	50,000 Hours
Lumens	183 lm/FT (4000K)
Efficacy	100 lm/w (4000K)

Electrical

Control	0-10V, MLV Dimming
Input Voltage	24VDC
Max Input Current	5A
Connections	20AWG, Copper Conductors
Operating Temperature	-4°F to 104°F (-20°C to 40°C)
Circuit	Class 2

Mechanical

Housing Construction	Flexible PCB Board Aluminium Enclosure Polycarbonate Optic (75% Trans.)
Cutting Increments	1.97" (50mm)
Stock Length	6ft
Environmental	IP20

