

BL areaFLOOD BX3723

High Power DMX Controlled LED Projector
100W, 100V-277VAC



Efficient and powerful, BL areaFLOOD BX3723 delivers exceptional illumination where you need it. With an output of up to 3,500 lumens and five unique beam angle distributions ranging from 12° to 90°, with RGBW and white light only options, this box style floodlight is ideal for adding highlights and spotlighting to exterior architectural and landscape features. Constructed with durable aluminum housing available in a variety of finish colors, clear shatter-resistant tempered glass lens, IP65 wet location rating and an on board 180° adjustable mounting bracket for precise light distribution. With integral 100-277VAC power supply and dmx decoder for full compatibility with BL controls technology and DMX512 control protocol. Create dynamic illumination in urban spaces with wall wash, graze, and area flood effects, on facades, canopies and multi-tiered structures.

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Up to 3500 lm/unit

100-277VAC

Product Detail



Lighting	Power	100W
	Average Life	50,000 Hours
Electrical	Controls	DMX, Bluetooth
	Input Voltage	100-277VAC
	Frequency	50/60Hz
	Connections	18AWG Copper Conductors
	Maximum per series	32 units (Signal) 10 units (Power)
Mechanical	Housing Construction	Dark Gray Aluminum Tempered Glass Lens
	Mounting	180° Adjustable Surface Mounting Bracket
	Cord Length	16" (400mm), extendable
Environmental	Environmental	IP65
	Certifications	ETL, CE, FCC
	Operating Temperature	-22°F to 122°F (-30°C to 50°C)




Performance

CCT/Color		3000K	4000K	5000K	RGB	RGBW (3000K)	RGBW (4000K)	RGBW (6000K)
Power	W/unit	100						
Lumens	lm/unit	3500			3000			
Efficacy	lm/W	35			30			

Ordering

Product Code	CCT/Color	Beam Angle
BL areaFLOOD BX3723	3000K	12°
	4000K	24°
	5000K	36°
	RGB	60°
	RGBW(3000K)	90°
	RGBW(4000K) RGBW(6000K)	

Dimensions

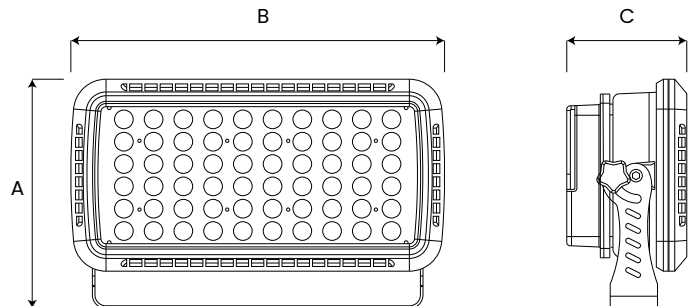

Size	A	B	C
inch	9.17"	15"	4.8"
mm	233	380	122

BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-804-874-4405 E: info@blighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at blighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

blighting.com

