

BL areaLINEAR LN1211

Linear LED Wall Washer
108W, 100-277VAC Line Voltage



Powerful, efficient, and engineered to deliver exceptional wall washing, grazing and architectural highlighting of exterior facades, signage, bridges and monuments. Vertically illuminate buildings with light projection in White or RGBW configurations, with an impressive output of up to 10260 lumens, in seven beam angle options. Durably constructed with anodized aluminum housing, shatter-resistant glass lens, weatherproof line voltage power cables, integral 100-277VAC power supply, dmx decoder, and two, 180° on board adjustable mounting brackets that allow for precise light distribution. Perfect for dynamic illumination of spatial envelopes in urban settings.

Up to 10260lm/unit

100-277VAC

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Product Detail



IP66



DMX



Bluetooth



LINE



ETL

Lighting	Power	108W
	Lamp	CREE, Osram
	Average Life	50,000 Hours
Electrical	Controls	DMX, Bluetooth
	Input Voltage	100-277VAC
	Connections	17AWG, Copper conductors
	Power Cord Length	1ft (0.3m), extendable
Mechanical	DMX Cords Length	1ft (0.3m), extendable
	Housing Construction	Black Aluminum Body, Tempered Glass Lens
	Weight	11kg (24lb)
	Mounting	Integrated 180° Adjustable Mounting Bracket
Accessories	LN1211 PCH	Power Cable 3pin Connector (5FT, 15FT, 30FT)
	LN1211 PCE	Power Cable Extension 3pin Connector (5FT, 15FT, 30FT)
	LN1211 DMX 4PH	DMX Cable 4-Pin Connector (5FT, 15FT, 30FT)
	LN1211 DMX 4PE	DMX Cable Extension 4-Pin Connector (5FT, 15FT, 30FT)
	LN1211 DMX RT M4P	DMX Terminator 4-Pin Male Connector (120-ohm Resistor)
Environmental	Ingress Protection	IP66
	Certifications	ETL
	Operating Temperature	-4°F to 122°F (-20°C to 50°C)

Maximum per series:

- 32 units(Signal)
- 10 units (Power)


Performance

CCT/Color		2200K	2700K	3000K	3500K	4000K	5700K	RGBW (3000K)	RGBW (4000K)
Power	W/unit	108							
Lumens	lm/unit	10260							3780
Efficacy	lm/W	95							35

Ordering

Product Code	CCT/Color	Beam Angle
BL areaLINEAR LN1211		
	2200K	4D (4°)
	2700K	8D (8°)
	3000K	15D (15°)
	3500K	25D (25°)
	4000K	45D (45°)
	5700K	60D (60°)
	RGBW (3000K)	10x30D (10° x 30°)
	RGBW (4000K)	

Dimensions

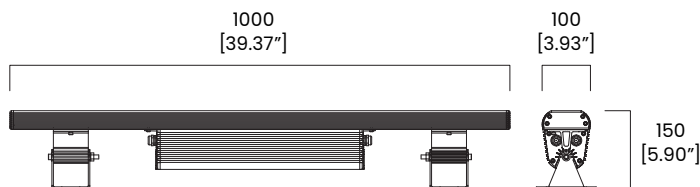

BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

bllighting.com

