

BL grazeLINEAR GL44424

Semi-Recessed Linear LED Wall Graze Luminaire
24W, 120V-277VAC



BL grazeLINEAR GL semi-recessed LED Linear Wall Washer is ideal for bathing walls with even illumination, providing wayfinding, accenting and grazing light over surfaces. Asymmetrical light distribution is emitted through the built in reflector, delivering precise, ultra low glare illumination where you need it. The attractive bezel is constructed of lightweight aluminum with white or black semi-recessed finish options, is suitable for dry and damp locations, and comes with spring clips or a mounting plate for easy installation into ceilings and walls with a modern, streamlined and minimalist style. Brighten corridors, add general lighting and frame your spaces with exceptionally smooth illumination. Graze light across contours and shadows and enhance halls, ballrooms, lobbies, offices, and public spaces by highlighting accent walls, signage, murals, decorative wall panels and other special features.

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Up to 1091lm/unit | 120-277VAC | Low Glare | Asymmetrical Light Distribution

Product Detail



Lighting	Power	24W
	Average Life	36,000 Hours
Electrical	Controls	0-10V
	Voltage	43.4VDC (120-277VAC Power Supply Input)
	Current	500mA
	Circuit	Class 2
Mechanical	Housing Construction	Extruded Aluminum (Black or White)
	Mounting	Optional Plaster Frame
	Ingress Protection	IP20
Environmental	Certifications	UL, FCC
	Operating Temperature	32°F to 95°F (0°C to 35°C)




Performance

Power	W/unit	24W		
CCT	CCT	2700K	3000K	4000K
Lumens	lm/unit	1091		
Efficacy	lm/W	45		
CRI	CRI	90+		

Ordering

Product Code	CCT	Color
BL grazeLINEAR GL44424	2700K	Black
	3000K	White
	4000K	

Dimensions

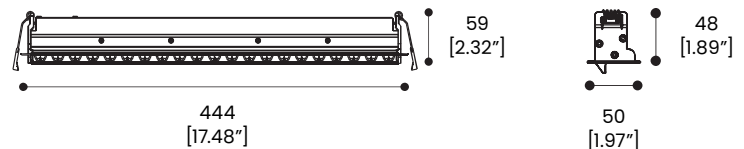

Power Supply Detail

Input	120 - 277 VAC
Max. Output	275-1400mA 30/40/50W
THD	< 20%
Power Factor	> 0.9
Dimming	0-10V
Dimming Range	1-100%
Startup Time	300ms

Connections-Lead Type	Side Leads
Ingress Protection	IP20
Certifications	UL, FCC
Dimensions	Height - 21.8mm (0.86")
	Width - 26.0mm (1.02")
	Length - 98.5mm (3.88")

BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-804-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

bllighting.com

